
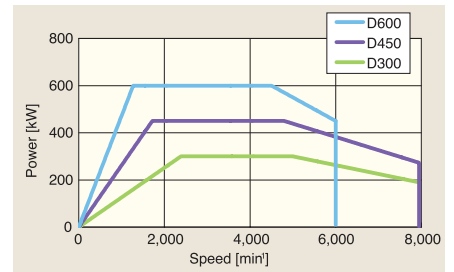
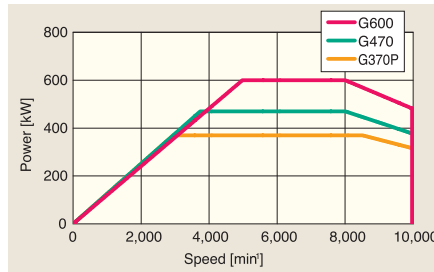


Specifications

Model			G250	G370	G370P	G470	G600	D300	D450	D600
Absorbing	Power	kW	250	370	370	470	600	300	450	600
	Torque	N·m	500	750	1,200	1,200	1,150	1,200	2,500	4,500
	Power at top speed	kW	208	247	315	376	480	188	270	450
	Torque at top speed	N·m	166	196	300	359	458	224	322	716
Motoring	Power	kW	200	300	300	410	500	240	400	500
	Torque	N·m	400	608	973	1,047	958	960	2,222	3,752
	Power at top speed	kW	167	200	255	328	400	150	240	375
	Torque at top speed	N·m	133	159	244	313	382	179	286	597
Base speed	min ⁻¹	4,771	4,708	2,944	3,740	4,982	2,386	1,718	1,272	
Top speed	min ⁻¹	12,000	12,000	10,000	10,000	10,000	8,000	8,000	6,000	
Power reducing speed	min ⁻¹	10,000	8,000	8,500	8,000	8,000	5,000	4,800	4,500	
Overload factor (Max. 30s, Below base speed)	%	120	120	140	138	108	120	120	120	108
Inertia (J)	kg·m ²	0.50	0.80	1.60	1.60	1.60	1.60	4.30	10.00	

Power curve (Absorbing)

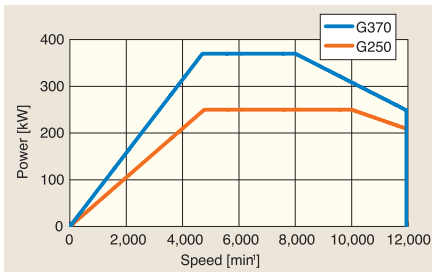

Torque curve (Absorbing)

